


ICE-Trade Alu-Rub.

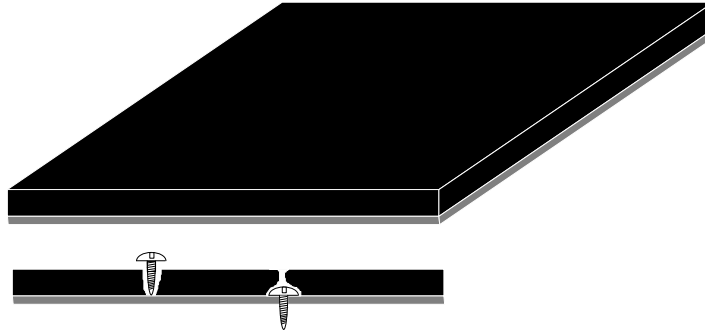

Rubber quality

Quality	Density ± 0,05	Hardness Shore A ± 5°	Tensile strength daN/cm ²	Elongation at break min. %	Abrasion resistance mm ³ DIN 53516
Natural	1,15	60	160	450	75

Dimensions Plate 10 m. x 1.500 ± 50 mm.

Thickness mm.	10	15	20	25	30
---------------	----	----	----	----	----

Alu-Rub is hot vulcanized on an aluminum sheet plate, 0,8 mm. thick.

ICE-Trade Perfo-Rub.

Rubber quality

Quality	Density ± 0,05	Hardness Shore A ± 5°	Tensile strength daN/cm ²	Elongation at break min. %	Abrasion resistance mm ³ DIN 53516
Natural	1,15	60	160	450	75

Dimensions Plate 10 m. x 1.500 ± 50 mm.

Thickness mm.	10	15	20	25	30
---------------	----	----	----	----	----

Perfo-Rub, a perforated steel plate, 0,8 mm thick, covered both sides with rubber, hot vulcanized.

On request other dimensions available.

For further information, please contact us.